

**PALFINGER**


**P 1000 TOP CLASS**

# **THE LARGEST ALL-TERRAIN ACCESS PLATFORM IN THE WORLD**



**LIFETIME EXCELLENCE**



## DIMENSIONS

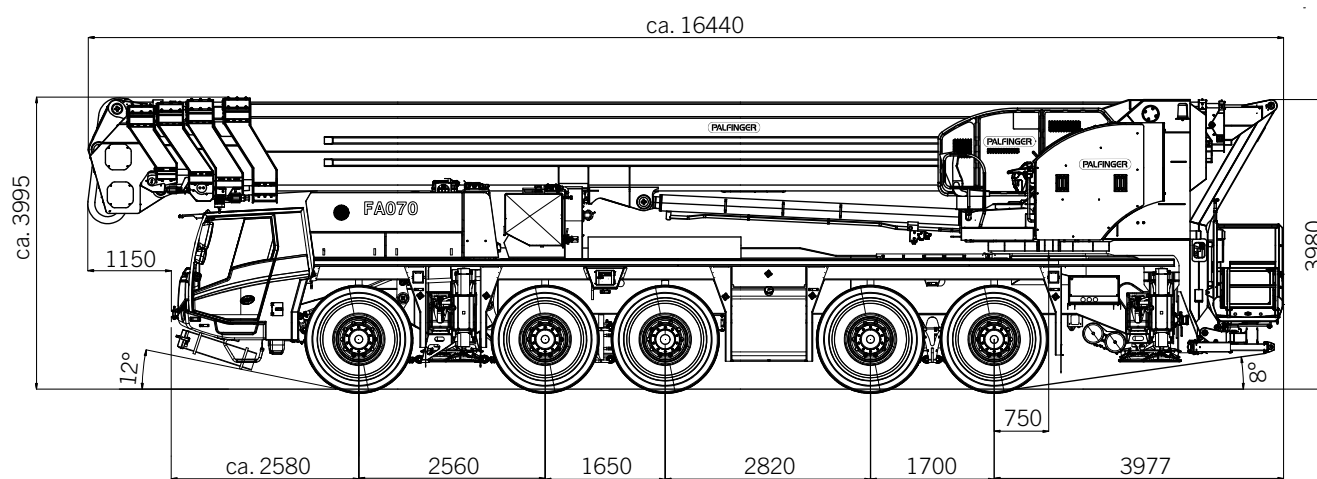

## WORKING DIAGRAMS

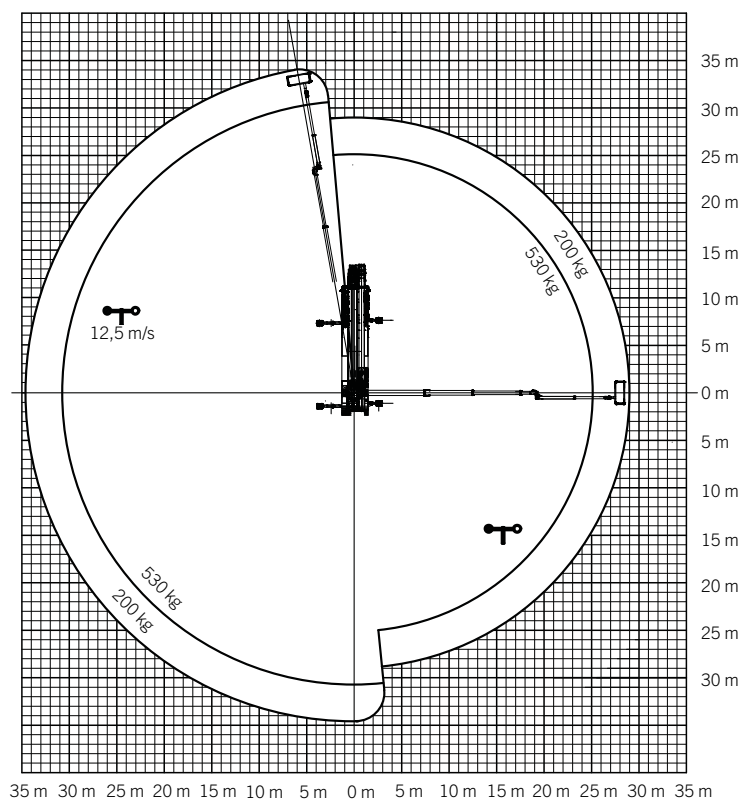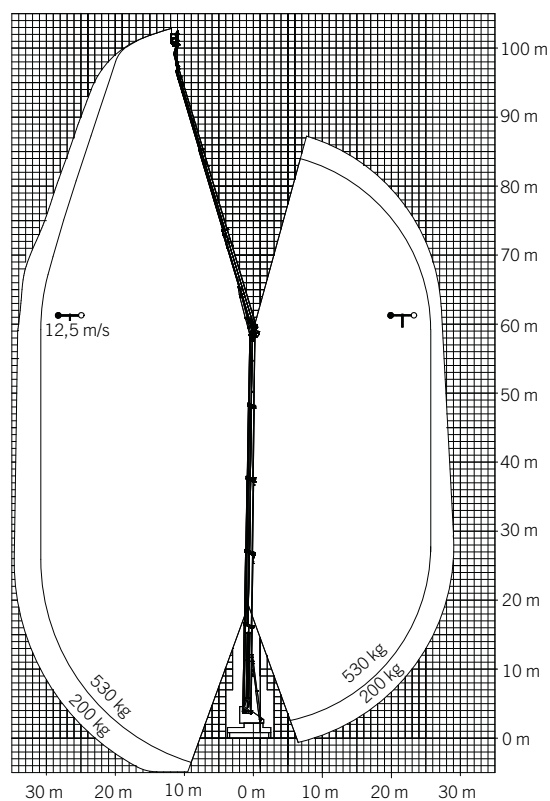

## TECHNICAL SPECIFICATIONS

|                             |                           |
|-----------------------------|---------------------------|
| Max. working height         | 102,5 m                   |
| Max. cage bottom height     | 100,5 m                   |
| Max. outreach               | 35 m                      |
| Rotation angle of turnable  | endless                   |
| Rotation angle of cage      | 2 x 85°                   |
| Max. cage load              | 530 kg (600 kg*)          |
| Size of cage                | 3,88/2,15 x 1,05 x 1,10 m |
| Height in transportposition | < 4 m                     |
| Width in transportposition  | 2,75 m                    |
| Overall length              | 16,44 m                   |
| Total weight                | 60.000 kg                 |

\* with heavy duty cage

## STANDARD EQUIPMENT

- Maximum stabilizing width of 7,50 m
- Slewing range endless
- Home function
- Automated positioning system
- Safety plates
- Stabilizer control at basis
- Motor Start/Stop in the workman basket
- Synthetic cover on control panel
- 230/400 V CEE outlet in the workman basket
- 5 anchor points to secure safety belt
- Displaceable control panel
- Graphic display
- Reversible slewing direction after panel relocation
- Collision protection for basket and jib boom
- Battery voltage monitoring in the basket



KP-P1000M1+EN

Units shown in the leaflet are partially optional equipped and do not always correspond to the standard version. Country-specific regulations must be observed. Dimensions may vary. Subject to technical changes, errors and translation mistakes.