
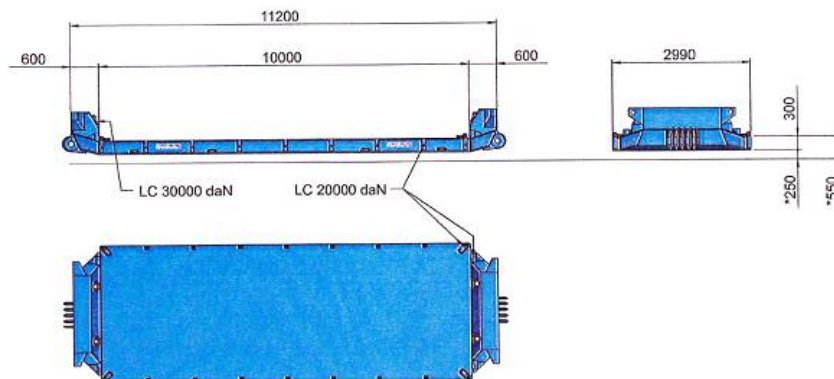


Low Profile Deck 10000 mm, without Extension Coupling

300 t

Datasheet:

- Flat box-type design from high-tensile steel STE 690
- Through steel flooring on the whole loading area
- In front and at rear coupling heads for modular bogies
- Hydraulic, brake and electric lines installed within the frame, with couplings
- 2 pairs lashing rings LC 30000 daN on the coupling heads
- 2 pairs bushings for screw-in lashing rings LC 20000 daN laterally of the coupling heads
- 11 pairs bushings for screw-in lashing rings LC 20000 daN laterally in the outer frame
- 11 pairs bushings for screw-in lashing rings LC 20000 daN on top of the outer frame including 4 units screw-in lashing rings LC 20000 daN
- Deadweight approx. 21300 kg

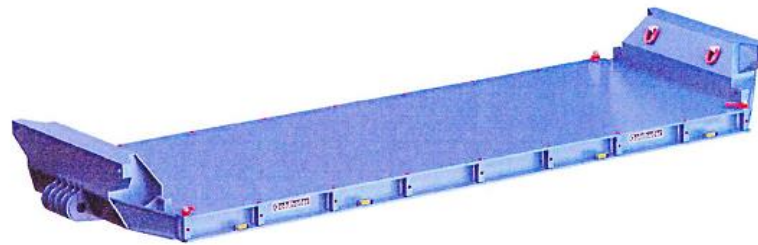

Payload	363 t	300 t	254 t
In trailer combination	5+5	6+6	7+7
Payload	250 t	239 t	214 t
In semitrailer combination	4+6	5+7	6+8

Remark: The given payloads are solely technical values.
They do not form a statement on legally permissible payloads.
Illustration similar, drawing not to scale.