


YOUR POSSIBILITIES OF USE WITH THE THP/ADD »ADDRIVE«



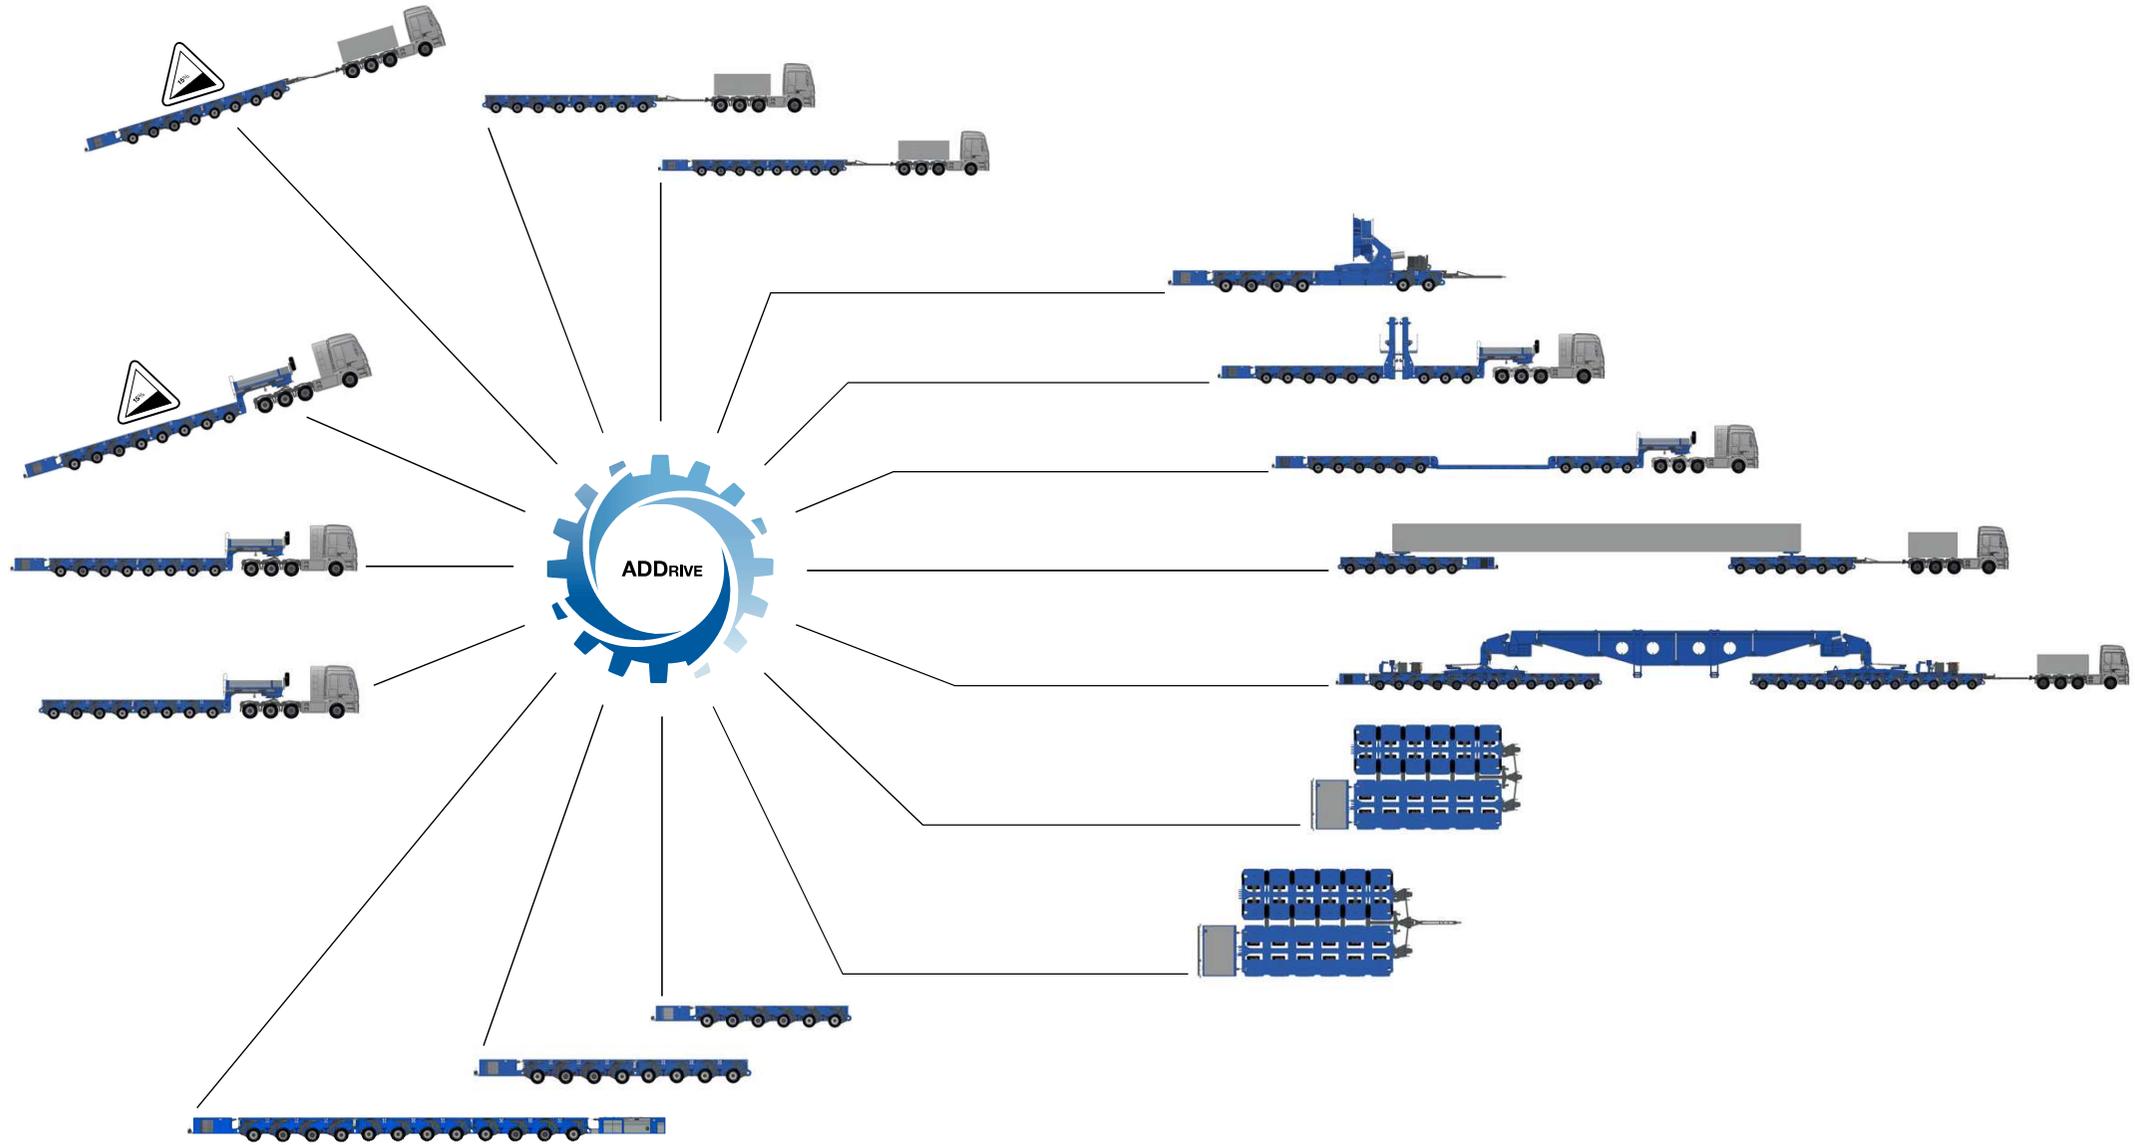

HEAVY-DUTY MODULES (SELF-PROPELLED)

- YOUR BENEFITS**
- ✓ Extremely high traction force per driven axle line
 - » Maximum incline capability less drive axles are required for the same incline
 - ✓ User-friendly operation concept
 - » Fast and simple in operation
 - ✓ Combinable with other towed and self-propelled heavy-duty modules
 - » More flexible fleet management

TECHNICAL FEATURES

+ Twin tires	215/75 R 17,5
+ Axle load	45 t at 1 km/h
+ Dead weight (4-axes)	15,3 t
+ Traction force (per driven axle line)	200 kN
+ Maximum steering angle	± 55°
+ Vehicle width	3,000 mm



PST/SL
IT GETS GOING WHEN THE GOING GETS TOUGH




HIGH BENDING TORQUE **DIVERSABLE POSSIBLE COMBINATIONS** **DISENGAGING OF THE AXLES**




TRANSPORT TECHNOLOGY



EXTREME FLEXIBILITY – UNLIMITED POSSIBILITIES
Due to the possibility of combination with other heavy-duty modules, enormous axle combinations can be implemented.



PST/SL



11



NEW OPTIONAL: »SPEEDDrive«

The PST/SL heavy-duty modules can be supplied with switchable driven axles for even more profitability when in action. This therefore means that it can be utilized as a towed module with higher speeds of up to 80 km/h (taking into account country-specific regulations). By activating the drive unit, the load can be positioned at its destination with millimeter's precision without traction unit and without time-consuming and costly reloading. In addition, the »SPEEDDrive« option enables you to tow the vehicle to the job site on its own axles.

»SPEEDDrive«

12

»ADDRIVE« | PST/SL ACCESSORIES AND OPTIONS

»ADDRIVE« | PST/SL TECHNICAL DATA



GENERAL ACCESSORIES



+ Radio remote

+ Cable remote

+ Emergency cable remote

+ Radio remote for »ADDRIVE«

PST POWERPACKS



+ 155 kW/210 PS, Width 2,400 mm, Deutz (TIER 3)

+ 207 kW/280 PS, Width 2,400 mm, Cummins (TIER 4 FINAL)

+ 360 kW/490 PS, Width 2,400 mm/3,000 mm, Deutz (TIER 3)

+ 390 kW/530 PS, Width 3,000 mm, Deutz (TIER 4 FINAL)

»ADDRIVE« POWERPACKS



+ 190 kW/260 PS, width 3,000 mm, Cummins (TIER 3)


+ 207 kW/280 PS, Width 3,000 mm, Cummins (TIER 4 FINAL)

+ 390 kW/530 PS, Width 3,000 mm, Cummins (TIER 4 FINAL)



TECHNICAL DATA

	»ADDRIVE«	PST/SL
Tires	Twin tires 215/75 R 17,5	Twin tires 215/75 R 17,5
Axle load	36 t at 5 km/h	45 t at 1 km/h
Axle compensation	600 mm	600 mm
Dead weight (4-axles)	15.3 t	15.3 t
Traction force (per driven axle line)	125 kN	200 kN
Vehicle width	3,000 mm	3,000 mm
Axle spacing	1,500 mm	1,500 mm
Maximum steering angle	± 55°	± 55°
Number of axles	4, 6	4, 6, 8

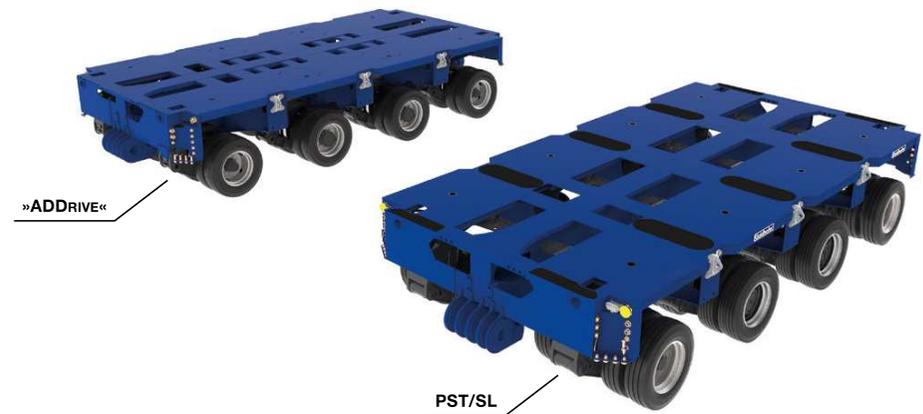

GOLDHOFER AKTIENGESELLSCHAFT
 Donaustrasse 95, 87700 Memmingen/Germany
 Telephone: +49 8331 15-0, Fax: +49 8331 15-239
 Web: www.goldhofer.com, E-Mail: info@goldhofer.com

GOLDHOFER INC. | FLITELINE, LLC
 7401 Riviera Boulevard, Miramar, FL 33023, USA
 Telephone: +1 954 433 5617, Fax: +1 954 433 5445
 Web: www.flitelineusa.com, E-Mail: info@flitelineusa.com

SALES
 Telephone Sales Europe: +49 8331 15-341
 Telephone Sales International: +49 8331 15-342
 E-Mail: sales-transporttechnology@goldhofer.com

SERVICES AND SPARE PARTS
 Telephone: +49 8331 15-400, Fax: +49 8331 15-247
 Emergency Hotline: +49 172 837 61 65
 E-Mail: service-transporttechnology@goldhofer.com